

# 16 Channel

**PoE+ Network Video Recorder** 

MODEL: VIGI NVR2016H-16MP



**4K HDMI Output** 

Provides Finer Details and Crystal Clarity **Quick Playback** 

16-Channel Synchronous Playback\*

2 SATA Interfaces

Up to 16 TB Capability for Each HDD\*\*

Remote Management

Dedicated VIGI app and PC Client

**ONVIF** 

Comprehensive Compatibility



### **Overview**

#### **VIGI Surveillance Solution**

The VIGI network video recorder coordinates with camera systems to help you view, store, and play back videos.

## Highlight



#### **16-Channel Live View**

Display each surveilled zone in real-time on a single interface for comprehensive control.



#### 16× PoE+ Ports for Simple Deployment

Easily connect and power your PoE camera with one RJ45 cable transmitting both data and power.



#### **4K HDMI Output**

Show more details with up to 8MP resolution for one channel and 20MP decoding capacity in total for all channels.



#### Remote Management

Take full control over your security anytime and anywhere on the VIGI app or PC client.



#### **Practical Playback**

Find the target footage easily by date, event types, and tags. Replay with variable playback speeds to quickly review footage.




### **Non-Stop Recording**

Stores up to 32 TB of footage from connected cameras to secure your data for quick and convenient access.



## **Network Topology**

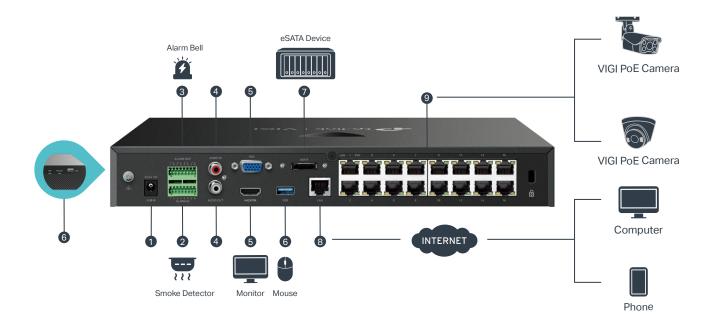

- 1. Power Supply
- 2. 6× Alarm IN Ports to Connect External Sensors
- 3. 4× Alarm OUT Ports to Connect Alarm Devices
- 4. AUDIO IN and AUDIO OUT for Two-Way Audio
- 5. HDMI and VGA for Video Independent Output
- 6. 1× USB 3.0 Port (Rear) and 1× USB 2.0 Port (Front) for Mouse and Keyboard Connections
- 7. 1× eSATA Port to Connect an External Storage Device\*\*
- 8. 1× 10/100/1000 Mbps LAN Port for Ethernet Connection
- 9. 16× PoE+ Ports to Connect and Power Your Cameras



The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

†HDD is not included.

\*Some features may operate sub-optimally due to compatibility issues. For best performance, we recommend using VIGI NVR with VIGI cameras.

 $^{\rm A}{\rm A}$  hard disk drive (not included) must be installed for operation. @2024 TP-Link



# Specifications

| NVR                    |   |
|------------------------|---|
| Product Model          | VIGI NVR2016H-16MP  |
| Video and Audio        |   |
| IP Video Input         | 16-Channel  |
| Incoming Bandwidth     | 320 Mbps  |
| Outgoing Bandwidth     | 320 Mbps  |
| HDMI Output Resolution | 1 Channel, Resolution: 3840x2160/30Hz, 1920x1080/60Hz, 1680x1050/60Hz, 1440x900/60Hz, 1280x1024/60Hz, 1280x720/60Hz                             |
| VGA Output Resolution  | 1 Channel, Resolution: 1920x1080/60Hz, 1680x1050/60Hz, 1440x900/60Hz, 1280x1024/60Hz, 1280x720/60Hz   |
| Video Output Mode      | HDMI/VGA Independent Output   |
| Multi-View Display     | 1/4/6/8/9/16  |
| Decoding               |   |
| Audio Compression      | G.711A/G.711U/G.726   |
| Video Compression      | H.265+/H.265/ H.264+/H.264  |
| Record Resolution      | 8MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/QCIF   |
| Synchronous Playback   | 16-Channel†   |
| Capability             | <ul> <li>25fps:</li> <li>10-ch @ 3MP, 16-ch @ 1080P</li> <li>30fps:</li> <li>4-ch @ 8MP, 6-ch @ 5MP, 8-ch @ 4MP</li> </ul>                      |
| Record Management      |   |
| Record Mode            | Manual Recording, Scheduling Recording, Motion Detection Recording  |
| Playback Mode          | Instant Playback, Rgular Playback, Tag Playback, Event Playback   |
| Backup Mode            | Regular Backup, Video Clip Backup   |
| Playback Function      | Play, Pause, Stop, Fast Forward, Fast Backward, Play By Frame, Full Screen, Video Clip, Export Clip, Digital Zoom, Lock Recording, Audio On/Off |
| Network                |   |
| Network Protocols      | UPnP (Plug and Play), NTP (Network Timing), SMTP, DNS, TCP/IP, UDP, ICMP, HTTP, HTTPS, DHCP, RTSP, SSL/TLS, RTP, IPv4, ARP                      |
| Interoperability       | ONVIF Profile S/T/G, CGI  |
| Mobile Phone Access    | Android, iOS  |
| Browser                | Chrome (57+), Firefox (52+), Edge (91+), Safari (11+)   |

| PoE                 |  |
|---------------------|--|
| Interface           | 1-16, RJ-45 10/100 Mbps Self-Adaptive Ethernet Interface   |
| Power               | 140 <sup>a</sup> W Available for All PoE+ Ports, 30 W Max per Port   |
| Standard            | 802.3at/af Compliant   |
| Auxiliary Interface |  |
| Network Interface   | 1, RJ-45 10/100/1000 Mbps Self-Adaptive Ethernet Interface   |
| USB Interface       | 1 Front USB 2.0 Port, 1 Rear USB 3.0 Port  |
| Audio Interface     | 1-ch RCA Input; 1-ch RCA Output  |
| Alarm In/Out        | 6/4  |
| Serial Interface    | N/A  |
| Power               | 1× DC Jack   |
| Reset Button        | 1  |
| Speaker             | N/A  |
| eSATA               | 1*   |
| HDMI                | 1  |
| VGA                 | 1  |
| Hard Disk           |  |
| SATA                | 2 SATA Interfaces  |
| Capacity            | Up to 16 TB Capacity for Each HDD*   |
| Alarm               |  |
| General Alarm       | <ul> <li>Motion Detection</li> <li>Video Tampering</li> <li>Scene Change Detection</li> <li>Line-Crossing Detection</li> <li>Intrusion Detection</li> <li>Region Entering Detection</li> <li>Region Exiting Detection</li> <li>Loitering Detection</li> <li>Object Abandoned/Removal Detection</li> <li>Vehicle Detection</li> <li>Human Detection</li> <li>Abnormal Sound Detection</li> <li>Smart Frame</li> <li>Note: The alarm function requires the use of a camera.</li> </ul> |
| Anomaly Alarm       | Video Loss     Offline and IP Conflict     Disk Exception     Login Exception     Fan Exception     Note: The alarm function requires the use of a camera.   |
| Alarm Linkage       | <ul> <li>Recording</li> <li>White Light Alarm</li> <li>Buzzer</li> <li>Log</li> <li>Audible Alarm</li> <li>Note: The alarm function requires the use of a camera.</li> </ul>   |

| General                              |  |  |
|--------------------------------------|--|--|
| Package Contents                     | <ul> <li>VIGI Network Video Recorder</li> <li>Power Adapter</li> <li>Power Cables</li> <li>HDD Power Cables</li> <li>HDD Data Cables</li> <li>Mounting Accessories</li> <li>Mouse</li> <li>Quick Installation Guide</li> </ul> |  |
| Power Supply                         | DC 53.5V/3.37A   |  |
| Max Power Consumption (Without Disk) | 6.2 W  |  |
| Max Power Consumption (With Disk)    | 40W  |  |
| Working Temperature                  | • NVR: -10–55 °C • Power Adapter: 0–40 °C  |  |
| Storage Temperature                  | -40-70 °C  |  |
| Working Humidity                     | 10%~90% RH Non-Condensing  |  |
| Storage Humidity                     | 10%~90% RH Non-Condensing  |  |
| Product Dimensions (W × D × H)       | 13.0 × 11.2 × 1.8 in (330 × 285 × 45 mm)   |  |
| Net Weight                           | 2.2 Kg <sup>#</sup>  |  |
| Gross Weight                         | 4.2 Kg <sup>#</sup>  |  |
| Certification                        | CE, NTRA, BSMI, VCCI, FCC, HDMI, ONVIF   |  |

<sup>&</sup>lt;sup>a</sup>Calculations are based on laboratory testing. Actual data is not guaranteed and will vary as a result of client limitations and environmental factors.

<sup>\*</sup>A hard disk drive (not included) must be installed for operation.


<sup>&</sup>lt;sup>†</sup>The number of simultaneously playable channels may be fewer than 16, or none, if the total resolution exceeds 32MP.

<sup>&</sup>lt;sup>‡</sup>This model currently supports ONVIF Profile S/T/G.

<sup>\*</sup>Due to the weight of this model, it is recommended to use a tray when mounting the rack with angle iron. Please note that the tray is not included.

### **Build Features**



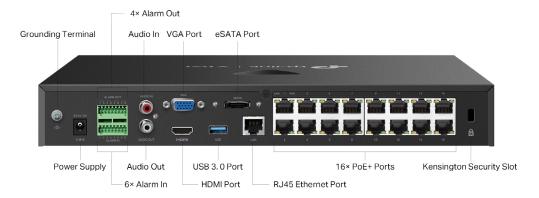



\*HDD is not included.