

Omada Pro L3 Managed Switch Datasheet

S6500-24MPP4Y


Omada Pro 24-Port 2.5G Stackable L3 Managed PoE++ Switch with 4 25G Slots



Highlights


- 24× 2.5 Gbps PoE++ RJ45 ports (up to 60 W PoE out per port)
- 4× 25 Gbps SFP28 slots
- Up to 1440 W total PoE budget*
- Physical stacking for built-in redundancy and performance
- L3 Features: OSPF, BGP, IS-IS, VRRP, PIM-SM/PIM-DM/PIM-SSM, ECMP, PBR
- Security Strategies: MACsec, Secure Boot, RADSEC, IMPB, SFTP, 802.1X, Port Security
- Highly available with two field-replaceable power supplies***, VRRP, ERPS, and BFD
- Easy O&M: NETCONF, Configuration Rollback, Hot Patching, and RSPAN
- Centralized cloud management via the web or the Omada app†

Product Pictures

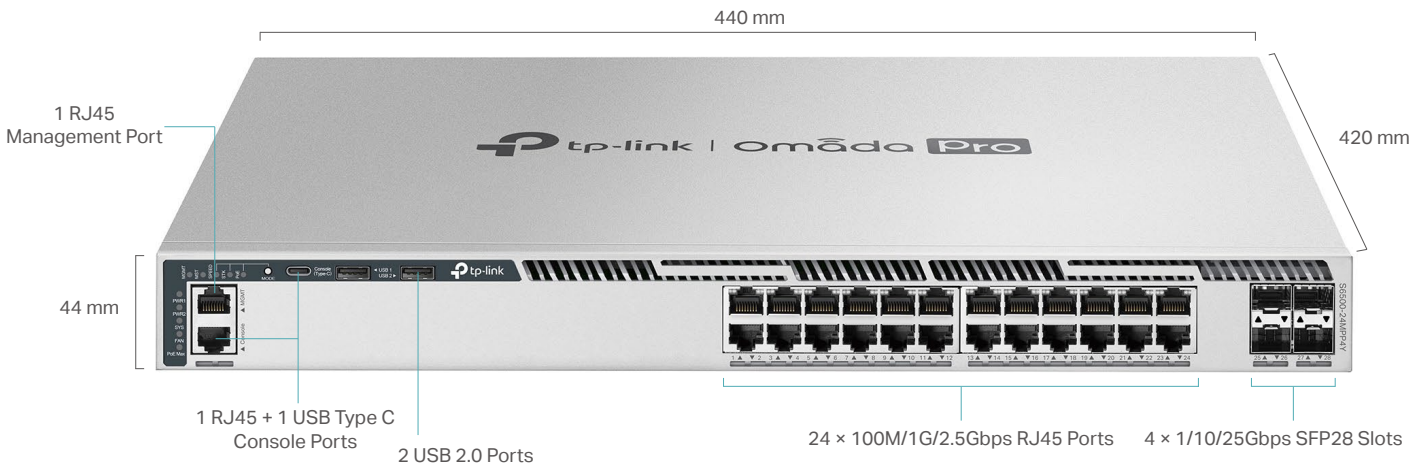

Omada Pro Solution

Omada Pro is an intelligent cloud solution for enterprise networking, offering enterprise-grade product line designed to meet the high-capacity, security, and management needs of various industries, such as MDUs, hospitality, K-12 education, public works, and more.

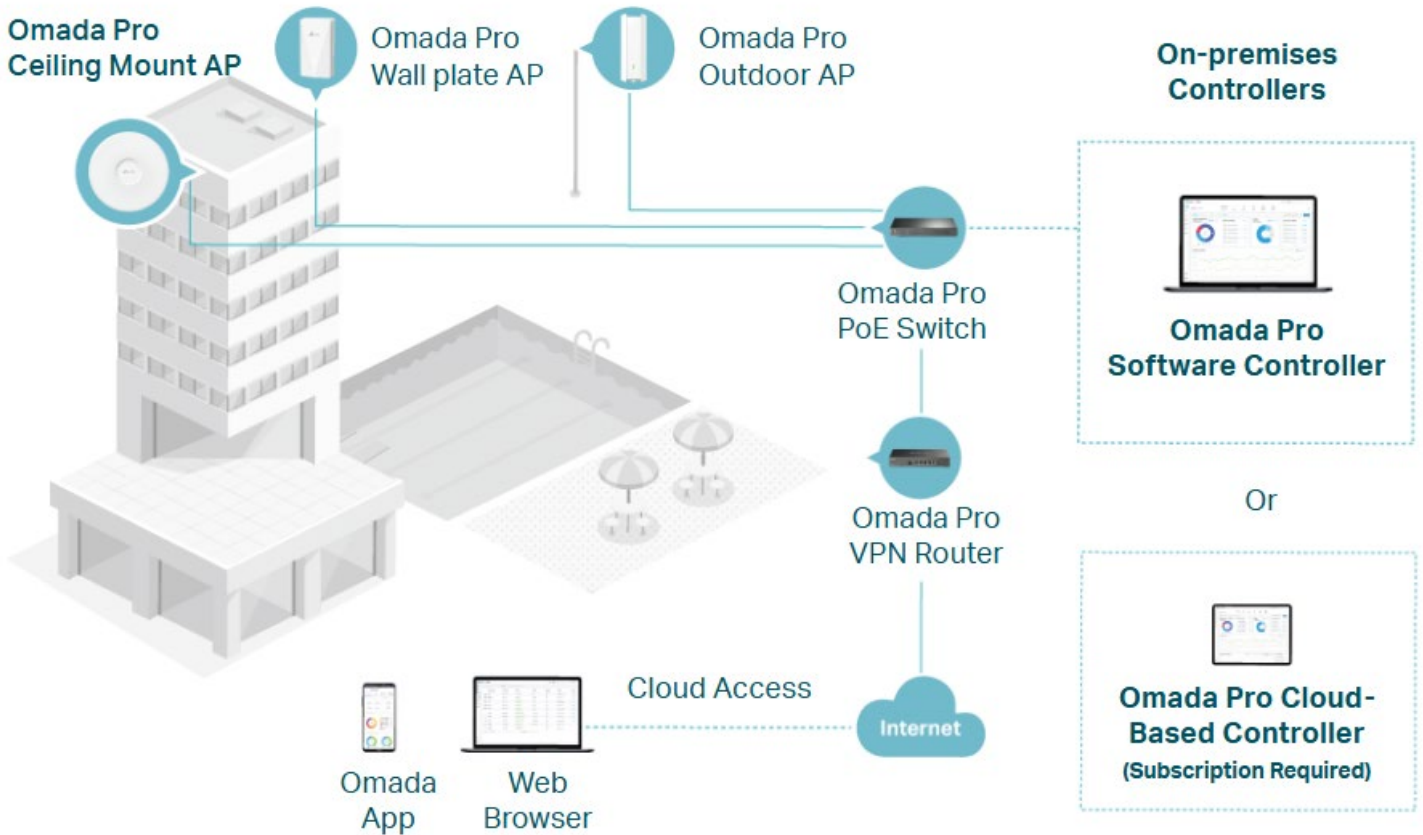

MDUs



Hospitality



Public Works



Catering



Manufacturing



Retail

Specifications

Hardware Features & Performance		
Model		S6500-24MPP4Y
General	Interface	24 × 100M/1G/2.5Gbps RJ45 Ports 4 × 1/10/25Gbps SFP28 Slots*
	Console Ports	1 × RJ45 + 1 × USB Type C
	Management Port	1 × RJ45
	USB Ports	2 × USB 2.0
	Flash	2×4 MB Nor + 8 GB EMMC
	DRAM	4GB DDR4
	Processor	Dual-Core ARM @1.5GHz CPU
PoE	PoE Standard	IEEE 802.3af/at/bt
	PoE Ports	24, max 60W/port
	PoE Power Budget	751 W (with 1*PSM900-AC, by default) 378 W (with 1*PSM500-AC) 802 W (with 2*PSM500-AC) 1168 W (with 1*PSM500-AC and 1*PSM900-AC) 1440 W (with 2*PSM900-AC)
	Fast PoE	Yes
	Perpetual PoE	Yes
Performance	Switching Capacity	320 Gbps
	Forwarding Bandwidth	160 Gbps
	Packet Forwarding Rate	238.1 Mpps
	MAC Address Table	32 K
	Packet Buffer	3 MB
	Stacking Port	25G SFP28 slot (all uplink ports can be used as stacking ports)**
	Stacking Bandwidth	Up to 200 Gbps (4 stacking ports)
	Max Stacking Number	12 in standalone mode, 4 in Omada controller mode
	Compatible Models for Stacking	S6500-24M4Y, S6500-24MPP4Y, S6500-48M6Y, S6500-48MPP6Y
	Transmission Method	Store and Forward
	Jumbo Frame	9 KB
Physical & Environmet	Power Supply	100-240 V ~50/60 Hz
	Redundant Power Supply	Max 2 hot swappable power supply module, N+1 redundant (shipping with one PSM900-AC module by default)***
	Suitable Power Supply Module	PSM500-AC, PSM900-AC
	Max Power Consumption	94.8 W (110 V/60 Hz) (With no PD connected) 1745.5 W (110 V/60 Hz) (With 1440W PD connected and powered by 2× PSM900-AC)
	Max Heat Dissipation	323.3 BTU/hr (110 V/60 Hz) (With no PD connected) 5952.2 BTU/hr (110 V/60 Hz) (With 1440W PD connected and powered by 2× PSM900-AC)
	Standby Power Consumption	64.4 W (220 V/50 Hz)
	Noise	1× PSM900-AC power supply module: Min: 38.4 dBA @1m 25 °C Max: 49.9 dBA @1m 25 °C 2× PSM900-AC power supply modules: Min: 40.6 dBA @1m 25 °C Max: 52.3 dBA @1m 25 °C
	Fan Quantity	4 hot swappable fan modules N+1 redundant
	Airflow	Front-to-back
	Surge Protection	Service port: ±6 kV in common mode Power port: ±6 kV in differential mode; ±6 kV in common mode
	ESD Protection	Air: ±15 kV, Contact: ±8 kV
	MTBF	284,863 h @ 25 °C
	Dimensions (W x D x H)	17.3 × 16.5 × 1.7 in (440 × 420 × 44 mm)
	Installation	Rackmount
	Operating Temperature & Altitude	-5 °C to 45 °C (23 °F to 113 °F) @ 2,000 meters -5 °C to 40 °C (23 °F to 104 °F) @ 3,000 meters
	Storage Temperature	-40 °C to 70 °C (-40 °F to 158 °F)
	Operation Humidity	10% to 90% RH, non-condensing
Storage Humidity	5% to 90% RH, non-condensing	
Certification	CE, FCC, RoHS	

*No more than two 10G RJ45/SFP+ modules (SM5310-T) are supported, and they can only be inserted into SFP+ slots 25&27.

**The 25G SFP28 slots support stacking only through 25G DAC/25G SFP28 modules rather than 10G DAC/10G SFP+ modules.

***An additional power supply module needs to be purchased separately.

Software Features[^]

Model		S6500-24MPP4Y	
System	System Info	<ul style="list-style-type: none"> • Device Description <ul style="list-style-type: none"> - Name - Location - System Contact • System Time <ul style="list-style-type: none"> - Manual - Synchronize with PC's Clock - SNTP Client • DST <ul style="list-style-type: none"> - Predefined Mode - Recurring Mode - Date Mode 	<ul style="list-style-type: none"> • LED <ul style="list-style-type: none"> - LED on/off • System IP <ul style="list-style-type: none"> - Static IP/DHCP/BOOTP • System IPv6 <ul style="list-style-type: none"> - Link-local Address Config - Global Address Autoconfig via RA Message - Global Address Autoconfig via DHCPv6 Server - Add a Global Address Manually
	User Management	<ul style="list-style-type: none"> • User Settings • Access Level: 4 levels 	<ul style="list-style-type: none"> • Password Recovery Settings
	System Tools	<ul style="list-style-type: none"> • Config Restore/Backup <ul style="list-style-type: none"> - Web: HTTP - CLI: TFTP/Flash/USB • Firmware Upgrade <ul style="list-style-type: none"> - Web: HTTP - CLI: TFTP/Flash/USB 	<ul style="list-style-type: none"> • System Reboot • System Reset • Boot Config (Dual Image) • Reboot Schedule • Config Rollback • Hot Patch
	Access Security	<ul style="list-style-type: none"> • Access Control Config <ul style="list-style-type: none"> - IP-based - MAC-based - Port-based - IPv6-based • HTTP Config <ul style="list-style-type: none"> - Enable/Disable - Session Config - Access User Number - Port Setting • SSL Config <ul style="list-style-type: none"> - SSLv3/TLSv1 Enable/Disable - CipherSuite Config - IPv6 SSL 	<ul style="list-style-type: none"> • SSH Config <ul style="list-style-type: none"> - Enable/Disable - v2 - Encryption Algorithm - Data Integrity Algorithm - Port Setting - IPv6 SSH • Telnet Config <ul style="list-style-type: none"> - Enable/Disable - Port Setting - IPv6 Telnet • Console Port <ul style="list-style-type: none"> - Baud Rate setting
	Stack	<ul style="list-style-type: none"> • Stack Setting • Stack-port LAG: up to 6 groups, each group supports a maximum of all stackable-ports 	<ul style="list-style-type: none"> • Stackable Devices: up to 12 devices • Stack MAC Address Switching Delay
	SDM Template	<ul style="list-style-type: none"> • Default Template <ul style="list-style-type: none"> - IPv4 ACL Rules: 300 entries - MAC ACL Rules: 300 entries - Combined ACL Rules: 300 entries - IPv6 ACL Rules: 0 entries - IPv4 Source Guard: 299 entries - IPv6 Source Guard: 0 entries • IPv4 Access <ul style="list-style-type: none"> - IPv4 ACL Rules: 0 entries - MAC ACL Rules: 300 entries - Combined ACL Rules: 500 entries - IPv6 ACL Rules: 0 entries - IPv4 Source Guard: 499 entries - IPv6 Source Guard: 0 entries 	<ul style="list-style-type: none"> • IPv6 Access <ul style="list-style-type: none"> - IPv4 ACL Rules: 0 entries - MAC ACL Rules: 200 entries - Combined ACL Rules: 0 entries - IPv6 ACL Rules: 250 entries - IPv4 Source Guard: 0 entries - IPv6 Source Guard: 249 entries • Omada <ul style="list-style-type: none"> - IPv4 ACL Rules: 0 entries - MAC ACL Rules: 0 entries - Combined ACL Rules: 600 entries - IPv6 ACL Rules: 150 entries - IPv4 Source Guard: 0 entries - IPv6 Source Guard: 0 entries
	Time Range	<ul style="list-style-type: none"> • Time Range Config 	<ul style="list-style-type: none"> • Holiday Config
	File System	<ul style="list-style-type: none"> • File Operation • FTP • SFTP 	<ul style="list-style-type: none"> • SCP • TFTP • USB Storage

Software Features[^]

Model		S6500-24MPP4Y	
L2 Features	Port	<ul style="list-style-type: none"> • Auto Negotiation/Auto MDI/MDIX • Port config <ul style="list-style-type: none"> - Speed and Duplex - Flow Control(802.3x) - Jumbo Frame: 1518-9216 KB • Port Mirror <ul style="list-style-type: none"> - Ingress (Many to One) - Egress (Many to One) - RSPAN 	<ul style="list-style-type: none"> • Port Security <ul style="list-style-type: none"> - Learn mode: Dynamic/Static/Permanent/Sticky - Port Max Learned MAC: 64 - Exceed Max Learned Trap • Port Isolation • Loopback Detection <ul style="list-style-type: none"> - Alert - Port Based - VLAN Based
	DDM		
	LAG	<ul style="list-style-type: none"> • Hash Algorithm: SRC MAC/DST MAC/SRC MAC + DST MAC/SRC IP/DST IP/SRC IP + DST IP 	<ul style="list-style-type: none"> • Static LAG • LACP (802.3ad) • Up to 64 LAGs, up to 8 ports per LAG
	Traffic Monitor	<ul style="list-style-type: none"> • TX Packets/Bytes • RX Packets/Bytes • TX Unicast/Multicast/Broadcast • RX Unicast/Multicast/Broadcast 	<ul style="list-style-type: none"> • TX Errors • RX Errors • TX/RX Packet Size Analysis
	MAC Address	<ul style="list-style-type: none"> • MAC Address Table: 32K entries • IVL/SVL: IVL • Create Static Unicast Address 	<ul style="list-style-type: none"> • Bind Dynamic Address • Create Filtering Address • MAC Notification Settings
	VLAN	<ul style="list-style-type: none"> • 802.1Q VLAN: 4K VLANs • MAC VLAN: 200 entries • Protocol VLAN <ul style="list-style-type: none"> - 16 Protocol VLAN Template - 12 Protocol VLAN Group 	<ul style="list-style-type: none"> • QinQ(VLAN VPN): 256 entries • Private VLAN • GVRP
	L2 Multicast	<ul style="list-style-type: none"> • Max Multicast Groups: 4K (IGMP Snooping & MLD Snooping & MVR) • IGMP Snooping <ul style="list-style-type: none"> - IGMP V1/V2/V3 - Report Message Suppression - Fast Leave - Unknown Multicast Discard - Static Multicast Groups - IGMP Snooping Querier - IGMP Packet Statistics - IGMP Authentication - Multicast Filtering: 256 profiles and 16 entries per profile - Router Port Setting: Static Router Port/Forbidden Router Port • MVR 	<ul style="list-style-type: none"> • MLD Snooping <ul style="list-style-type: none"> - MLD V1/V2 - Report Message Suppression - Unknown Multicast Discard - Fast Leave - Static Multicast Groups - MLD Snooping Querier - MLD Packet Statistics - Multicast Filtering: 256 profiles and 16 entries per profile - Router Port Setting: Static Router Port/Forbidden Router Port
	STP	<ul style="list-style-type: none"> • STP(802.1d) • RSTP(802.1w) • MSTP(802.1s) • MSTI instances: 16 	<ul style="list-style-type: none"> • STP Security <ul style="list-style-type: none"> - Loop Protect - Root Protect - TC Protect - BPDU Protect - BPDU Filter
	LLDP (802.1ab)	<ul style="list-style-type: none"> • Local Info • Neighbor Info 	<ul style="list-style-type: none"> • Statistic Info • LLDP-MED
	L2PT		
	PPPoE ID Insertion	<ul style="list-style-type: none"> • Circuit-ID Type 	<ul style="list-style-type: none"> • Remote-ID
	PoE	<ul style="list-style-type: none"> • PoE Power Budget (Max): 1440W • Port Config <ul style="list-style-type: none"> - PoE Status: Enabled/Disabled - PoE Priority: Low/Middle/High - Power Limit - Time Range - PoE Profile 	<ul style="list-style-type: none"> • PoE Profile Config • PoE Auto Recovery
	ERPS	<ul style="list-style-type: none"> • Ring: 16 	
	Virtual MAC		
	Sticky MAC		

Software Features[^]

Model	S6500-24MPP4Y	
L3 Features	IPv4 Interfaces: 256(shared with IPv6 Interfaces) IPv6 Interfaces: 256(shared with IPv4 Interfaces)	
	IPv4 Static Routes: 1024 (shared with IPv6 Static Routes) IPv6 Static Routes: 512 (shared with IPv4 Static Routes)	
	IPv4 Host Routes: 6100 (shared with IPv4 Host Routes) IPv6 Host Routes: 6100 (shared with IPv6 Host Routes)	
	IPv4 Network Routes: 10240 (shared with IPv6 Network Routes) IPv6 Network Routes: 5120 (shared with IPv4 Network Routes)	
	ECMP	<ul style="list-style-type: none"> • Max ECMP Routes: 256 • Max ECMP Nexthops per Destination: 32
	ARP	<ul style="list-style-type: none"> • Static ARP: 512 • Dynamic ARP: 12288
	ND: 12288	
	DHCP	<ul style="list-style-type: none"> • DHCP Server <ul style="list-style-type: none"> - IP Pools: 64 - Max Leases: 8000 - Manual Binding Entries: 1000 - Exclude IP range Entries: 100 • DHCP Relay • DHCP L2 Relay • DHCPv6 Relay • DHCPv6 L2 Relay
	VRRP	<ul style="list-style-type: none"> • VRRP V2/V3 • VRRP Instance: 64 • VRRP Virtual IP: 32 per instance
	OSPF	<ul style="list-style-type: none"> • OSPFv2 <ul style="list-style-type: none"> - OSPF Process: 16 - Graceful Restart - OSPFv2 BFD • OSPFv3 <ul style="list-style-type: none"> - OSPFv3 Instance: 1 - OSPFv3 BFD
	RIP	<ul style="list-style-type: none"> • RIPv1/v2 • RIPng
	IS-IS	<ul style="list-style-type: none"> • IS-ISv4 • IS-ISv6 • IS-IS BFD
	BGPv4	
	PIM	<ul style="list-style-type: none"> • PIM-DM (IPv4) • PIM-SM (IPv4) • PIM-SSM (IPv4) • IPv4 Multicast Route entries: 1024
	IGMP	<ul style="list-style-type: none"> • Version: v1/v2/v3 • IGMP Groups: 2048
	BFD	<ul style="list-style-type: none"> • Template Numbers: 16 • Session Numbers: 8
	PBR	
uRPF		
QoS	Class of Service	<ul style="list-style-type: none"> • Priority Queues: 8 Queues • Port Priority • 802.1P Priority • DSCP/ToS Priority • Priority Schedule Mode: SP/WRR per Queue • Queue Weight Config: For WRR/SP+WRR Mode
	Bandwidth Control	<ul style="list-style-type: none"> • Rate Limit <ul style="list-style-type: none"> - Ingress Rate Limit - Egress Rate Limit - Rate Limit Grade: 64kbps • Storm Control <ul style="list-style-type: none"> - Control Mode: kbps/ratio - Broadcast - Multicast - Unknown Unicast
	Voice VLAN	<ul style="list-style-type: none"> • OUI entries: 64
	WRED	<ul style="list-style-type: none"> • WRED profile: 16

Software Features[^]

Model		S6500-24MPP4Y		
Network Security	IP-MAC Binding	<ul style="list-style-type: none"> • Binding entries: 1024 entries • Manual Binding 	<ul style="list-style-type: none"> • ARP Scanning • DHCP Snooping 	
	IPv6-MAC Binding	<ul style="list-style-type: none"> • Binding entries: 1024 entries • Manual Binding 	<ul style="list-style-type: none"> • DHCPv6 Snooping • ND Snooping 	
	ARP Inspection	<ul style="list-style-type: none"> • ARP Detect entries: 1024 entries • ARP Detect 	<ul style="list-style-type: none"> • ARP Defend • ARP Statistics 	
	ND Detection	<ul style="list-style-type: none"> • ND Detection entries: 1024 entries • ND Detect 	<ul style="list-style-type: none"> • ND Statistics 	
	IP Source Guard	<ul style="list-style-type: none"> • IP Source Guard entries - Default SDM Template: 299 - IPv4 SDM Template: 499 - IPv6 SDM Template: 0 	<ul style="list-style-type: none"> • Security Type - Source IP - Source IP + Source MAC 	
	IPv6 Source Guard	<ul style="list-style-type: none"> • IPv6 Source Guard entries - Default SDM Template: 0 - IPv4 SDM Template: 0 - IPv6 SDM Template: 249 	<ul style="list-style-type: none"> • Security Type - Source IPv6 - Source IPv6 + Source MAC 	
	RA Guard: 30 entries			
	DoS Defend	<ul style="list-style-type: none"> • Scan SYNFIN • Xmascan • NULL Scan 	<ul style="list-style-type: none"> • SYN sPort less 1024 • Ping Flooding • SYN/SYN-ACK Flooding 	
	DHCP Filter	<ul style="list-style-type: none"> • DHCPv4 Filter - Legal Server entries: 200 	<ul style="list-style-type: none"> • DHCPv6 Filter - Legal Server entries: 200 	
	802.1x	<ul style="list-style-type: none"> • Control Type - Port Based - MAC Based • Auth Method: PAP/EAP-MD5/EAP-TLS/EAP-TTLS/EAP-PEAP 	<ul style="list-style-type: none"> • Radius Authentication • Radius Accounting • Radius Server Load Balancing • RADSEC • Guest VLAN • VLAN Assignment • MAB 	
	AAA			
	ACL	<ul style="list-style-type: none"> • Time-Range - Time Slice - Week Time-Range - Absolute Time-Range - Holiday • MAC ACL • IP ACL • Combined ACL • IPv6 ACL • Rule Operation - Permit - Deny • Policy Action - Mirror - Rate Limit - Redirect - QoS Remark • Binding - Port Binding - VLAN Binding 	<ul style="list-style-type: none"> • Default Template - IPv4 ACL Rules: 300 entries - IPv6 ACL Rules: 0 entries - MAC ACL Rules: 300 entries - Combined ACL Rules: 300 entries • IPv4 Access - IPv4 ACL Rules: 0 entries - IPv6 ACL Rules: 0 entries - MAC ACL Rules: 300 entries - Combined ACL Rules: 500 entries • IPv6 Access - IPv4 ACL Rules: 0 entries - IPv6 ACL Rules: 250 entries - MAC ACL Rules: 200 entries - Combined ACL Rules: 0 entries • Omada - IPv4 ACL Rules: 0 entries - IPv6 ACL Rules: 150 entries - MAC ACL Rules: 0 entries - Combined ACL Rules: 600 entries 	
	MACSec (gcm-aes-128, gcm-aes-256)			
	Secure boot			
Virtualization	IP Tunnel	<ul style="list-style-type: none"> • IPv6 over IPv4 • IPv6 over IPv4 GRE 	<ul style="list-style-type: none"> • IPv4 over IPv4 GRE • Tunnel entries: 100 	

Software Features[^]

Model		S6500-24MPP4Y		
Maintenance	System Monitor	<ul style="list-style-type: none"> • CPU Monitor • Memory Monitor 		
	sFlow			
	OAM	<ul style="list-style-type: none"> • EFM <ul style="list-style-type: none"> - Link Monitoring - Remote Failure Indication Config - Statistics 		
	DLDP			
	SNMP	<ul style="list-style-type: none"> • SNMP Version: v1/v2c/v3 • SNMP Config <ul style="list-style-type: none"> - Global Config - SNMP View - SNMP Group - SNMP User - SNMP Community 	<ul style="list-style-type: none"> • Notification <ul style="list-style-type: none"> - Trap: IPv4/IPv6 - Inform: IPv4/IPv6 • RMON v1/v2 • Public MIBs • Private MIBs 	
	MIBs	<ul style="list-style-type: none"> • MIB II (RFC1213) • Interface MIB (RFC2233) • Ethernet Interface MIB (RFC1643) • Bridge MIB (RFC1493) • P/Q-Bridge MIB (RFC2674) • RMON MIB (RFC2819) • RMON2 MIB (RFC2021) 	<ul style="list-style-type: none"> • RADIUS Accounting Client MIB (RFC2620) • RADIUS Authentication Client MIB (RFC2618) • Remote Ping, Traceroute MIB (RFC2925) • Support TP-Link Private MIB 	
	NETCONF			
	IEEE 802.3az Energy Efficient Ethernet (EEE)			
	DHCP Auto Install			
	Log	<ul style="list-style-type: none"> • Display/Filtering • Severity Level • Save to Flash 	<ul style="list-style-type: none"> • Remote Host • Backup Log 	
	Device Diagnostics	<ul style="list-style-type: none"> • Cable Test 		
	Network Diagnostics	<ul style="list-style-type: none"> • Ping • IPv6 Ping 	<ul style="list-style-type: none"> • Tracert • IPv6 Tracert 	
	Others	Index		
Show running config		<ul style="list-style-type: none"> • Use the show running config command to view device's running status via telnet. • Configuration File: Import/Export/Edit 		
Omada SDN Controller	Omada Pro SDN controller			

Ordering Information

Host Switch

Model	Description
S6500-24MPP4Y	Omada Pro 24-Port 2.5G Stackable L3 Managed PoE++ Switch with 4 25G Slots

Power Supply Module

Model	Description
PSM500-AC	500 W AC Power Supply Module
PSM900-AC	900 W AC Power Supply Module

SFP/SFP+/SFP28 Module

Model	Description
SM311LS	Gigabit SFP module, Single-mode, LC interface, Up to 20km distance
SM311LM	Gigabit SFP module, Multi-mode, LC interface, Up to 550m distance
SM321A	Gigabit WDM Bi-Directional SFP Module, single-mode, LC connector, TX: 1550 nm/RX: 1310 nm, 20 km
SM321A-2	Gigabit WDM Bi-Directional SFP Module, single-mode, LC connector, TX: 1550 nm/RX: 1310 nm, 2 km
SM321B	Gigabit WDM Bi-Directional SFP Module, single-mode, LC connector, TX: 1310 nm/RX: 1550 nm, 20 km
SM321B-2	Gigabit WDM Bi-Directional SFP Module, single-mode, LC connector, TX: 1310 nm/RX: 1550 nm, 2 km
SM5110-LR	10GBase-LR SFP+ LC Transceiver, single-mode, LC connector, 1310nm, 10 km
SM5110-SR	10GBase-SR SFP+ LC Transceiver, multi-mode, LC connector, 850nm, 300 m
SM6110-SR	25GBase-SR SFP28 LC Transceiver, MMF (Multimode fiber), LC connector, 850 nm, 100 m
SM6110-LR	25GBase-LR SFP28 LC Transceiver, SMF (Single-mode fiber), LC connector, 1310 nm, 10 km

Direct Attach Cable

Model	Description
SM6220-1M	1 Meter 25G SFP28 Direct Attach Cable
SM5220-1M	1 Meter 10G SFP+ Direct Attach Cable
SM5220-3M	3 Meter 10G SFP+ Direct Attach Cable

RJ45 SFP/SFP+ Modules

Model	Description
SM331T	1000BASE-T RJ45 SFP Module
SM5310-T	10GBASE-T RJ45 SFP+ Module

MC Series Media Converter

Model	Description
MC210CS	Gigabit Single-Mode Media Converter, up to 20 km, chassis mountable
MC200CM	Gigabit multi-mode SC SFP Transceiver, up to 550 m, chassis mountable
MC200L	Gigabit SFP slot supporting mini-GBIC modules, chassis mountable
MC1400	14-slot power supply chassis for TP-LINK MC Series Media Converter, 19-inch rack-mountable

FC Series Media Converter

Model	Description
FC311A-2	Gigabit Single-Mode WDM Media Converter, up to 2 km, TX:1550nm, RX:1310nm, chassis mountable
FC311B-2	Gigabit Single-Mode WDM Media Converter, up to 2 km, TX:1310nm, RX:1550nm, chassis mountable
FC311A-20	Gigabit Single-Mode WDM Media Converter, up to 20 km, TX:1550nm, RX:1310nm, chassis mountable
FC311B-20	Gigabit Single-Mode WDM Media Converter, up to 20 km, TX:1310nm, RX:1550nm, chassis mountable
FC1400	14-slot power supply chassis for TP-LINK FC Series Media Converter, 19-inch rack-mountable

†These functions require the use of the Omada Pro SDN Controller. Zero-Touch Provisioning requires the use of the Omada Pro Cloud-Based Controller.

Some models featured in this guide may be unavailable in your country or region. Visit TP-Link website for local sales information: www.tp-link.com.

Specifications are subject to change without notice. All the brands and product names are trademarks or registered trademarks of their respective holders. © 2024 TP-Link