

BPE36V60ART2U/BPE72V60ART2U



HOT-SWAPPABLE EXTENDED BATTERY MODULE WITH BUILT-IN CHARGER TO PROLONG RUNTIME

The hot-swappable battery module achieves constant recharge time without resorting to UPS's power



Designed for data center and critical applications, the Extended Battery Module (EBM) Series can be used in conjunction with compatible UPS systems to provide prolonged system runtime during power interruption. With the built-in charger design, the EBMs can charge directly from utility without resorting to UPS, significantly saving total charging time when charging multiple EBMs. The products also feature hot-swappable battery packs, allowing users to safely remove and replace battery packs without affecting connected loads.

SERIES FEATURES

- Rack/Tower Convertible Configurations
- Sealed Lead-acid Batteries
- Built-in charger for Extended Battery Module (EBM)
- User-replaceable Batteries
- Hot-swappable Batteries
- EBM Expansion Capability
- Metal Housing

PRODUCT CALLOUTS

- 1 . On-board Replaceable Fuse Cover
- 2 . AC Input Inlet
- 3 . AC Output Outlet
- 4 . AC Circuit Breaker
- 5 . DC Output Cable
- 6 . DC Input Connector

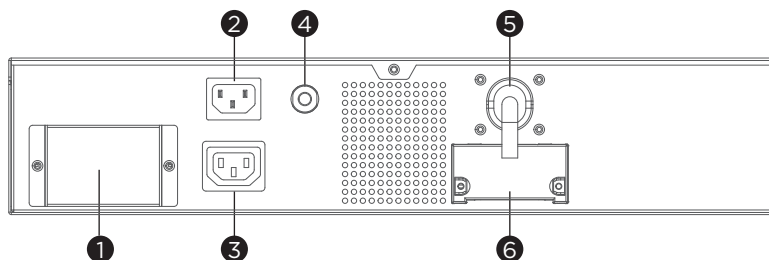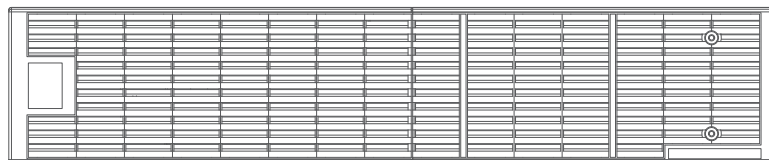

BPE36V60ART2U/BPE72V60ART2U

TECHNICAL SPECIFICATIONS

| Model Name | BPE36V60ART2U | BPE72V60ART2U |
|--|------------------------------|---|
| General | | |
| Nominal Output Voltage (Vdc) | 36 | 72 |
| Rated Output Current (A) | 60 | |
| Battery | | |
| Battery Type | Sealed Lead-acid | |
| Built-in Charger | Yes | |
| Typical Recharge Time (Hours) | 4 | |
| User-replaceable | Yes | |
| Hot-swappable | Yes | |
| Expansion Ready | Yes | |
| Replacement Battery Pack | RBPO074 x 1, RBPO079 x 1 | RBP0077 |
| Replacement Battery Pack Quantity (pcs) | 2 | |
| Compatible UPS | OL1000ERTXL2U, OL1500ERTXL2U | OL2000ERTXL2U, OL2200ERTXL2U, OL3000ERTXL2U |
| Physical | | |
| Form Factor | Rackmount, Tower | |
| Physical Size | | |
| Dimensions (WxHxD) (mm.) | 433 x 88 x 430 | 433 x 88 x 600 |
| Weight (kg.) | 23 | 44 |
| Installed Rack Height (U) | 2 | |
| Environmental | | |
| Operating Temperature (°C) | 0 - 40 | |
| Operating Relative Humidity (Non-condensing) (%) | 0 - 90 | |
| Certifications | | |
| Certifications* | CE, RCM | |
| RoHS | Yes | |

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
 #All specifications are subject to change without notice.